

Yealink

SIP-T40G

Dual-port Gigabit Ethernet

132 x 64 pixel graphical LCD
with backlight

HD voice: HD Codec,
HD Speaker, HD Handset

3 VoIP accounts, BLF/BLA,
IPV6, Open VPN



Opus Codec



HD Audio



Gigabit



Paperless

This stylish T40G is a feature-rich SIP phone ideal for everyday office users. Benefitting from dual-port Gigabit Ethernet, an intuitive interface, BLF's, HD Voice, 3-way conferencing, handsfree speakerphone, it also supports corded or wireless headset and EHS.

With simple flexible and secure provisioning, the T40G utilises industry-standard encryption protocols for users to provision and perform software upgrades both in-house and remotely.

Contact us

Tel: +44 (0)161 763 2060 Email: sales@yealink.co.uk Web: www.yealink.co.uk

SIP-T40G

Audio Features

- > HD voice: HD handset, HD speaker
- > Wideband codec: Opus, G.722
- > Narrowband codec: G.711(A/μ), G.729AB, G.726
- > DTMF: In-band, Out-of-band (RFC 2833) and SIP INFO
- > Full-duplex hands-free speakerphone with AEC
- > VAD, CNG, AEC, PLC, AJB, AGC

Phone Features

- > 3 VoIP accounts
- > One-touch speed dial, redial
- > Call forward, call waiting
- > Call transfer, call hold
- > Call return, group listening, SMS
- > Mute, auto answer, DND
- > 3-way conference call
- > Direct IP call without SIP proxy
- > Ring tone selection/import/delete
- > Hotline, emergency call
- > Set date & time manually or automatically
- > Dial Plan
- > XML Browser
- > Action URL/URI
- > RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)
- > Enhanced DSS Key

Directory

- > Local phonebook up to 1000 entries
- > Black list
- > XML/LDAP remote phonebook
- > Smart dialing
- > Phonebook search/import/export
- > Call history: dialed/received/missed/forwarded

IP-PBX Features

- > Busy Lamp Field (BLF)
- > Bridged Line Appearance (BLA)
- > Anonymous call, anonymous call rejection

- > Hot-desking, voice mail
- > Message Waiting Indicator (MWI)
- > Call park, call pickup
- > Intercom, paging, music on hold
- > Call recording
- > Flexible seating
- > Executive and Assistant
- > Centralized call recording
- > Visual Voice Mail

Display and Indicator

- > 2.3" 132x64-pixel graphical LCD with backlight
- > LED for call and message waiting indication
- > Dual-color (red or green) illuminated LEDs for line status information
- > Intuitive user interface with icons and soft keys
- > Multilingual user interface
- > Caller ID with name and number
- > Power saving

Feature keys

- > 3 line keys with LED
- > 5 features keys: message, headset, mute, redial, hands-free speakerphone
- > 4 context-sensitive "soft" keys
- > 6 navigation keys
- > 2 volume control keys
- > Mute key
- > Headset key
- > Hands-free speakerphone key

Interface

- > Dual-port Gigabit Ethernet
- > 2 x RJ45 10/100M Ethernet ports
- > 1 x RJ9 (4P4C) handset port
- > 1 x RJ9 (4P4C) headset port
- > 1 x RJ12 (6P6C) EHS port
- > Power over Ethernet (IEEE 802.3af), Class 2

Other Physical Features

- > Stand with 2 adjustable angles
- > Wall mountable
- > External Yealink AC adapter (optional): AC 100~240V input and DC 5V/600mA output
- > Power consumption (PSU): 0.9-1.3W
- > Power consumption (PoE): 1.1-1.6W
- > Dimension (W*D*H*T): 212mm*189mm*175mm*54mm
- > Operating humidity: 10~95%
- > Operating temperature: -10~50°C (+14~122°C)

Management

- > Configuration: browser/phone/auto-provision
- > Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy
- > Auto-provision with PnP
- > BroadSoft device management
- > Zero-sp-touch TR-069
- > Phone lock for personal privacy protection
- > Reset to factory, reboot
- > Package tracing export, system log

Network and Security


- > SIP v1 (RFC2543), v2 (RFC3261)
- > Call server redundancy supported
- > NAT traversal: STUN mode
- > Proxy mode and peer-to-peer SIP link mode
- > IP assignment: static/DHCP
- > HTTP/HTTPS web server
- > Time and date synchronization using SNTP
- > UDP/TCP/DNS-SRV (RFC 3263)
- > QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS DSCP
- > SRTP for voice
- > Transport Layer Security (TLS)
- > HTTPS certificate manager
- > AES encryption for configuration file

- > Digest authentication using MD5/MD5-sess
- > OpenVPN, IEEE802.1X
- > IPv6
- > LLDP/CDP/DHCP VLAN
- > ICE

Package Features

- > Package content:
 - Yealink SIP-T40G IP phone
 - Handset with handset cord
 - Ethernet Cable
 - Stand
 - Quick Start Guide
 - Power Adapter (Optional)
- > Qty/CTN: 5 PCS
- > N.W/CTN: 5.7 kg
- > G.W/CTN: 6.4 kg
- > Giftbox size: 246mm*223mm*120mm
- > Carton Meas: 620mm*233mm*258mm

Compliance

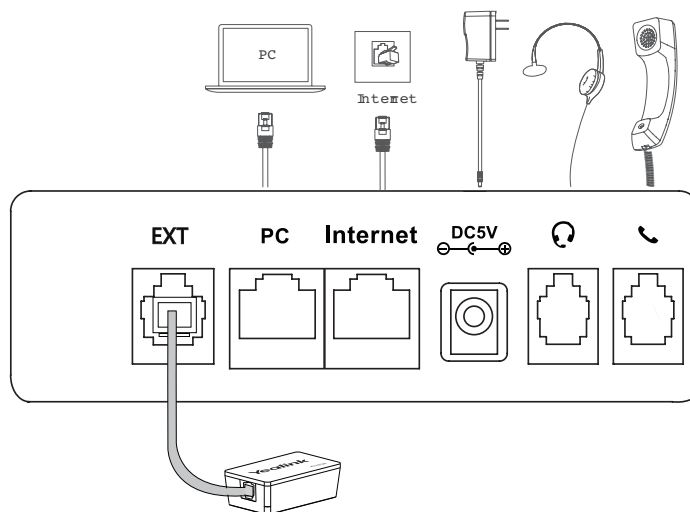

Yealink

Yealink (UK) Ltd, Pennine House, Salford Street, Bury, Lancashire, BL9 6YA, United Kingdom
Tel: +44 (0)161 763 2060 Email: sales@yealink.co.uk Web: www.yealink.co.uk

MK5312YealinkT40GDS010817

© 2017 Yealink (UK) Ltd. All rights reserved.
Information contained in this document is subject to change without notice.